


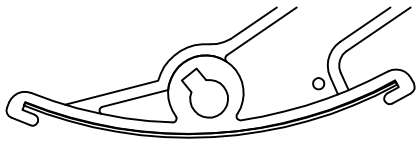
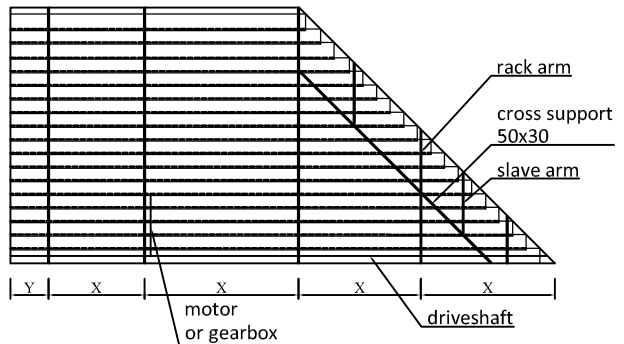
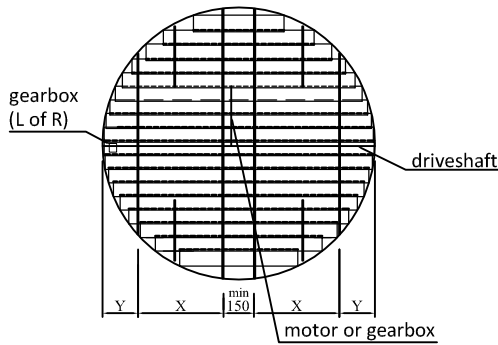


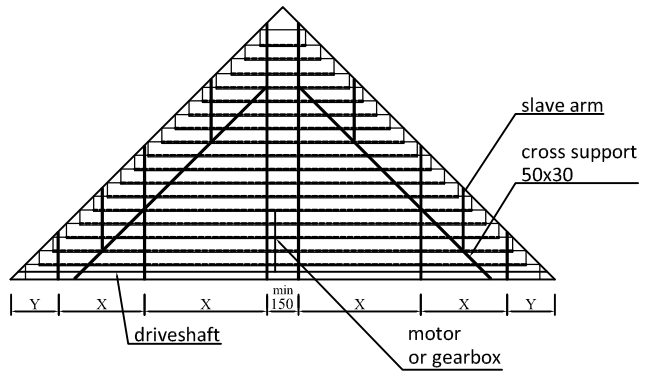

INTERNAL BLINDS

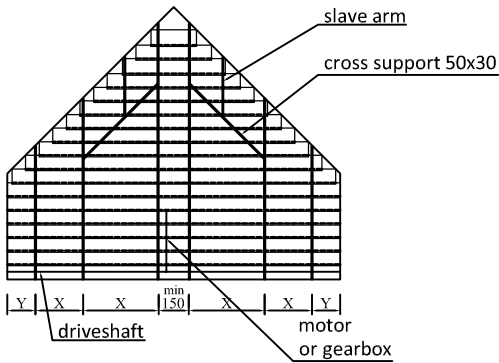

50mm aluminium slat

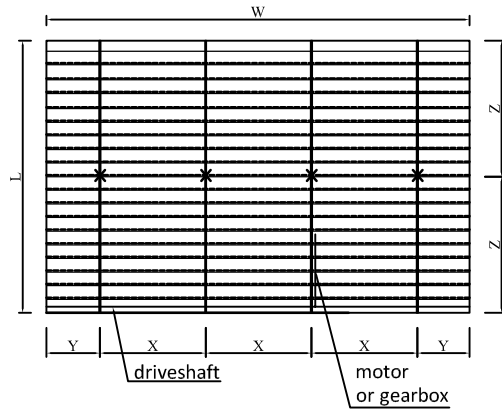

Sunshield 50A aluminium slat		
max. width	W max. 440 cm	
max. length / drop / height	L max. 600 cm	
max. area		
cord operator	max. 6 m ²	
gearbox (rod & crank)	max. 15 m ²	
50220 230V tubular+gear 6:1	max. 20 m ²	
50265 230V compact motor	max. 16 m ²	
number of rack arms	minimum # rack arms	
	standard # rack arms	
	170 cm = 2 pcs	90 cm = 2 pcs
	171-260 cm = 3 pcs	91-180 cm = 3 pcs
	261-350 cm = 4 pcs	181-270 cm = 4 pcs
	351-440 cm = 5 pcs	271-360 cm = 5 pcs
		361-450 cm = 6 pcs
rack arm distance	X 90 cm	
slat side overhang	Y 40 cm	
support distance	Z	
standard rack arm 35 mm	225 cm	
heavy duty rack arm 80 mm	350 cm	
box rack arm 100 mm	450 cm	